DMC 150SS Profile

DrexelMetals
Roofing Systems + Custom Fabrication

Our DMC 150SS roof system will lend striking dimension to any architectural design. This versatile 1-1/2" mechanically seamed panel can be curved to a wide range of radiuses and applications – from barrel roofs to conical shapes and more. Concealed fasteners and a floating clip system reduce the effect of thermal stresses on the panels, helping to maintain a beautifully smooth, uniform appearance despite fluctuations in temperature.

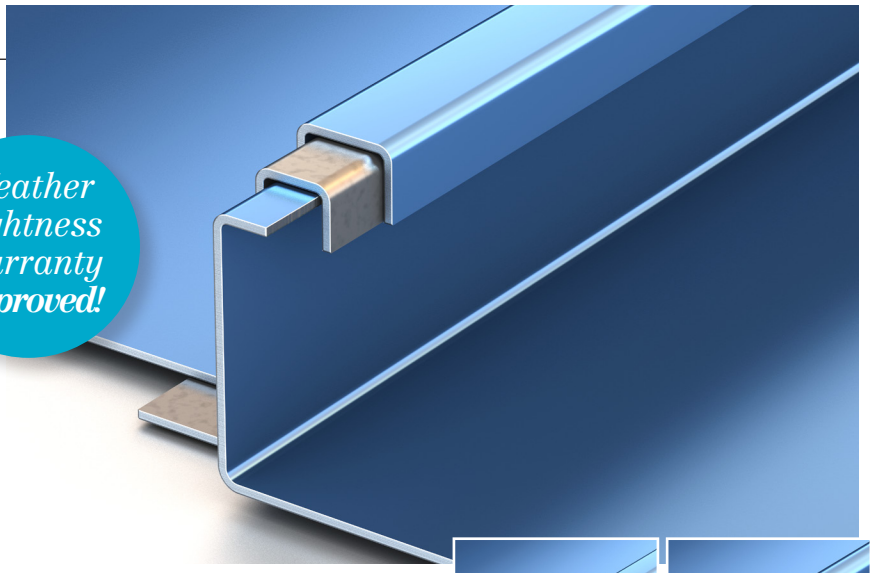

Weather Tightness Warranty Approved!

Ideal Application:

- *Commercial*
- *Residential*



Single lock panel



Double lock panel

DMC 150SS Profile

HISTORIC PANEL

Available widths:

12", 14", 16", 18", 19" or 20"*

*Drexel Metals design pressures, wind uplifts and test reports are for specific deck attachments, material gauges, clip spacing and panel widths. A complete specification and listing is available online at www.drexelmetals.com

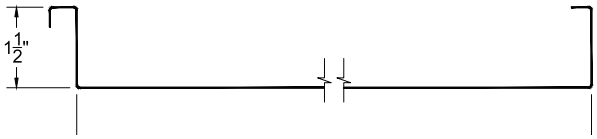

Substrates available:

- Galvalume® – 24ga and 26ga
- Drexlume® – 24ga and 26ga
- Aluminum – .032"
- Copper – 16 oz and lead-coated copper
- Falzinc

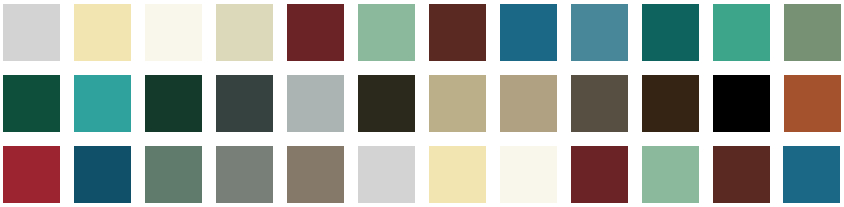

Profile Options:

- Single lock panel
- Double lock panel
- Radius panel (single or double lock)



Unseamed panel



Single lock panel



Double lock panel

Finishes and product warranty:

Available in a variety of coatings and colors by AkzoNobel. See the Drexel Metals color card for standard colors and paint specifications.

AkzoNobel
Tomorrow's Answers Today

Galvalume® Substrate: High-performance painted metal roofing product, carefully tensioned leveled for superior flatness.

35 YEAR WARRANTY

35-Year Non Pro-rated PVDF Paint Warranty

Aluminum Substrate: High-performance painted metal roofing product, carefully tensioned leveled for superior flatness.

35 YEAR WARRANTY

35-Year Non Pro-rated PVDF Paint Warranty

Drexlume® Substrate: Mill finished Galvalume® with a two-sided, clear acrylic finish.

25 YEAR WARRANTY

25-Year Non Pro-rated Drexlume Warranty (Acrylic Coated Galvalume)

Production options:

Factory made or field rolled to exact lengths
Optional: striation, beads, pencil ribs

Installation:

Can be installed over steel decking with PolyIso, or over plywood decking and Drexel Metals MetShield® underlayment.



MetShield Underlayment

Slope:

Minimum slope 2:12

Minimum Roof Pitch:
2:12 – low roof pitch

Testing:

In accordance with:

CLASSIFIED UL

ASTM INTERNATIONAL Standards Worldwide

MIAMI-DADE COUNTY APPROVED

- UL 580 Wind Uplift (Class 90)
- TAS 125 Wind Uplift
- UL 1897 Extended Phase Wind Uplift
- UL 2218 Class 4 Hail Impact
- UL 790 Class A Fire Rating
- UL Environmental – SRI Third Party Verified
- ASTM E1646 Water Infiltration
- TAS 100 Wind Driven Rain
- ASTM E1680 Air Infiltration
- ASTM E1886 Missile Impact
- ASTM 2140 Static Pressure Water Head
- Miami-Dade County Approved
- Florida Building Code Approved
- Texas Department of Insurance Approval

DrexelMetals
Roofing Systems + Custom Fabrication

www.drexelmetals.com

1234 Gardiner Lane, Louisville, KY 40213
888-321-9630 toll-free • 502-690-6174 fax

ENERGY STAR PARTNER

©2013 Drexel Metals, Inc. All rights reserved. Galvalume® is a registered trademark of BEIC International, Inc. Drexlume™ is a trademark of Drexel Metals, Inc. ENERGY STAR name and logo are registered U.S. marks and are owned by the U.S. government. Colors shown represent the actual color as closely as possible. To ensure exact color for final approval, a metal color chip is available. Warranty statements mentioned are outlines: complete Limited Warranty information is available on request. No other warranty expressed or implied is applicable.