


DMC 550S Profile

A superior integral seam design and quick installation – that’s the hallmark of the DMC 550S panel. This expertly crafted interlocking roof system provides a powerfully protective weathertight seam. The finished results deliver a substantial measure of quality and style that’s certain to stand the test of time.

*Weather
Tightness
Warranty
Approved!*

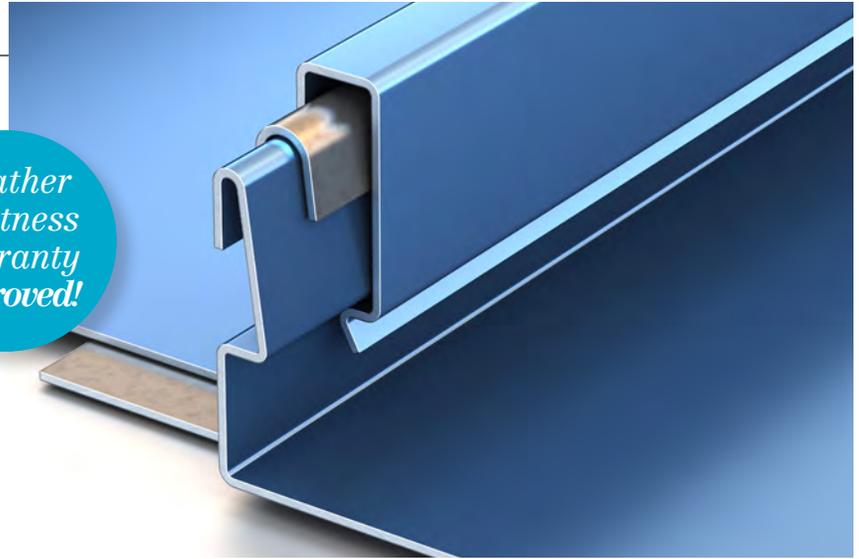

Ideal Application:

Commercial

Residential




DMC 550S Profile

Available widths:


12", 14", 16" or 19"

*Drexel Metals design pressures, wind uplifts and test reports are for specific deck attachments, material gauges, clip spacing and panel widths. A complete specification and listing is available online at www.drexelmetals.com

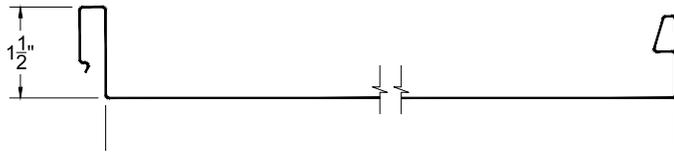

Substrates available:

- Galvalume® – 24ga
- Drexlume® – 24ga

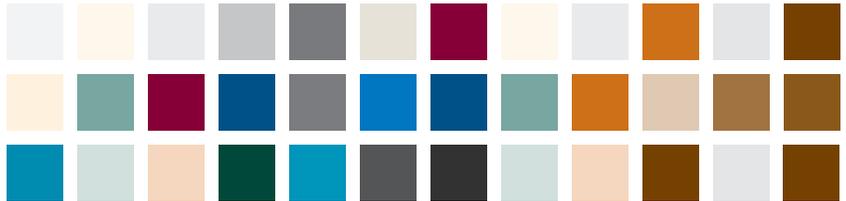

Finishes and product warranty:

Available in a variety of coatings and colors by AkzoNobel. See the Drexel Metals color card for standard colors and paint specifications.



Galvalume® Substrate:
High-performance painted metal roofing product, carefully tensioned leveled for superior flatness.

35 YEAR WARRANTY
35-Year Non Pro-rated
PVDF Paint Warranty

Drexlume® Substrate:
Mill finished Galvalume® with a two-sided, clear acrylic finish.

25 YEAR WARRANTY
25-Year Non Pro-rated
Drexlume Warranty
(Acrylic Coated Galvalume)

Production options:

Factory made or field rolled to exact lengths
Optional: striation, beads, pencil ribs

Installation:

Can be installed over open frame steel purlins, or over plywood decking and Drexel Metals MetShield® underlayment.



Slope:

Minimum slope 3:12



Minimum Roof Pitch:
3:12 – low roof pitch

Testing:

In accordance with:



- UL 580 Wind Uplift (Class 90)
- UL 2218 Class 4 Hail Impact
- UL 263 Fire Certification
- UL 790 Class A Fire Rating
- UL Environmental – SRI Third-Party Verified

Drexel Metals
Roofing Systems + Custom Fabrication



www.drexelmetals.com

1234 Gardiner Lane, Louisville, KY 40213
888-321-9630 toll-free • 502-690-6174 fax

